



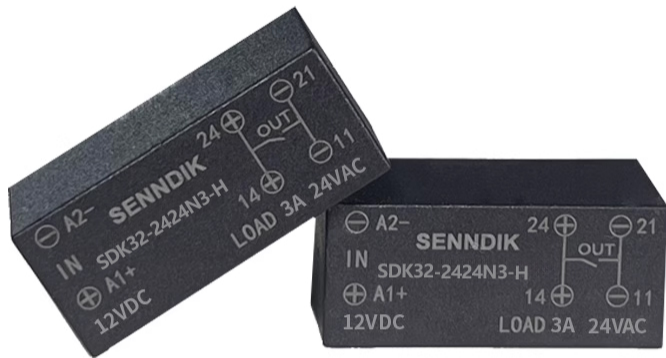

选型指南

SELECTION GUIDE

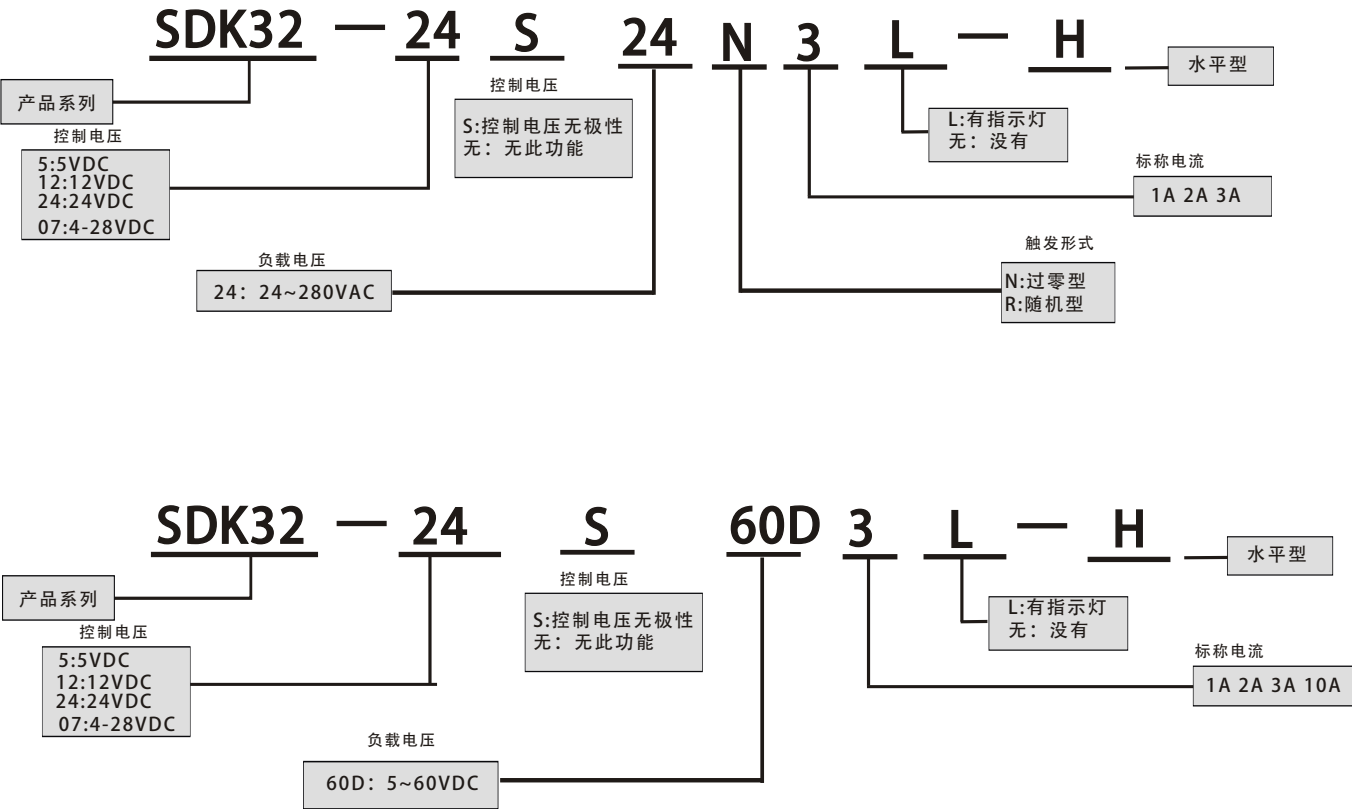


产品参数

PRODUCT PRARMETERS

产品型号	标称电流	负载电压	控制电压	触发方式
SDK32 1224Z3-H	3A	24-280VAC	12VDC	过零触发
SDK32 2424Z3-H	3A	24-280VAC	24VDC	过零触发
SDK32 1260DZ3-H	3A	5-60VDC	12VDC	过零触发
SDK3 2460DZ3-H	3A	5-60VDC	24VDC	过零触发
SDK32 2460DZ10-H	10A	5-60VDC	24VDC	过零触发
SDK32 1260DZ4-H	4A	5-60VDC	12VDC	过零触发
SDK32 2460DZ4-H	4A	5-60VDC	24VDC	过零触发
SDK32 2424Z4-H	4A	24-280VAC	24VDC	过零触发
SDK32 1224Z4-H	4A	24-280VAC	12VDC	过零触发


接线图

WIRING DIAGRAM

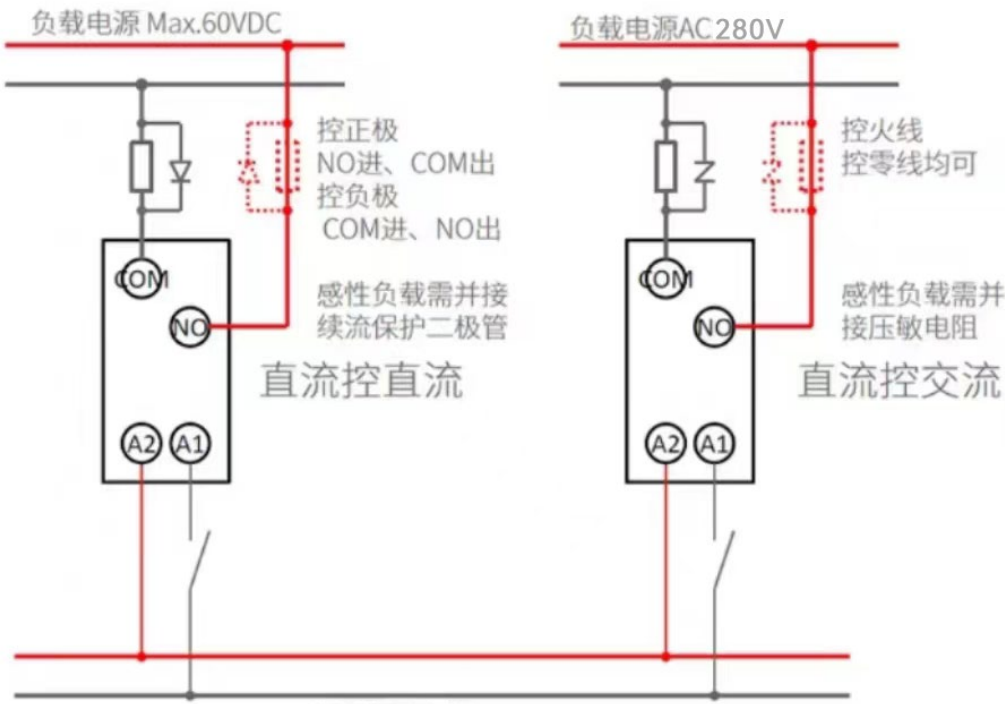


机械规格

MECHANICAL SPECIFICATIONS

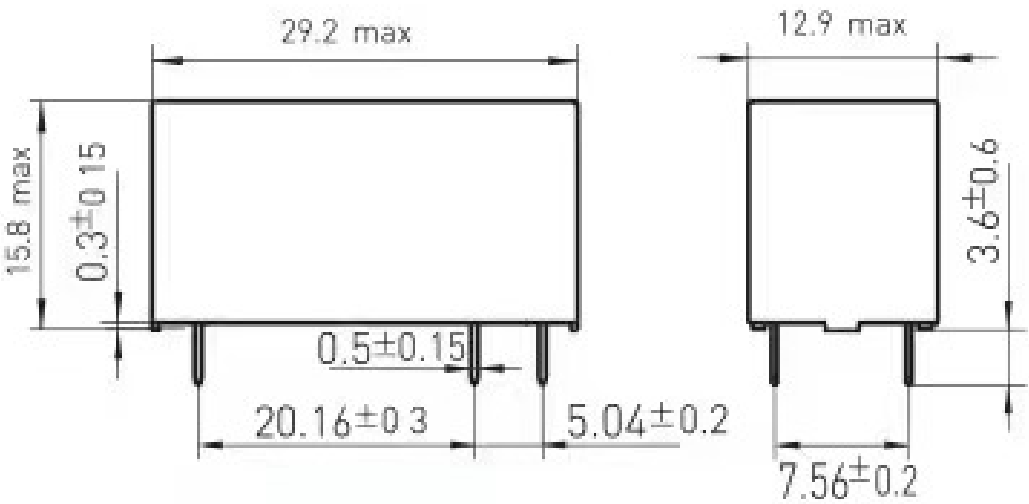





导轨底座尺寸

RAIL BASE DIMENSIONS

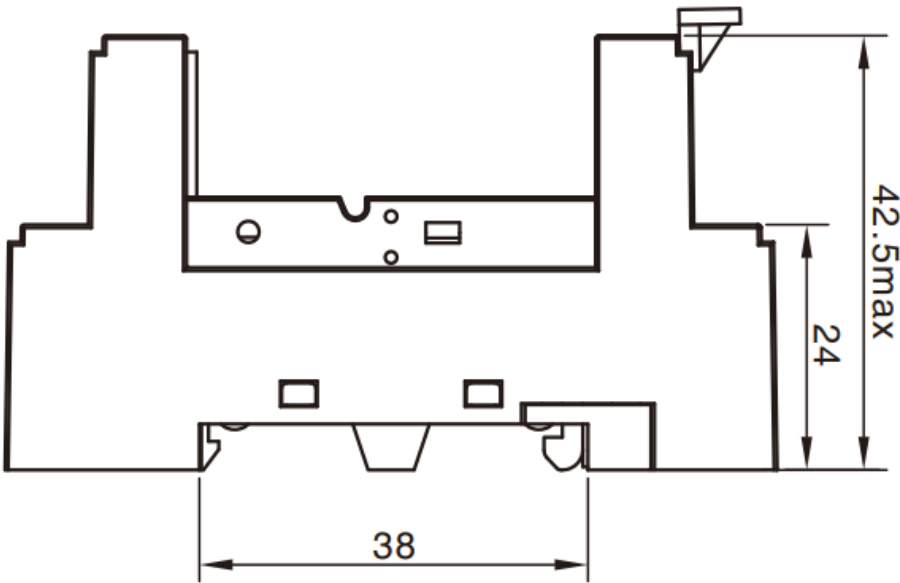

温度特性

TEMPERATURE

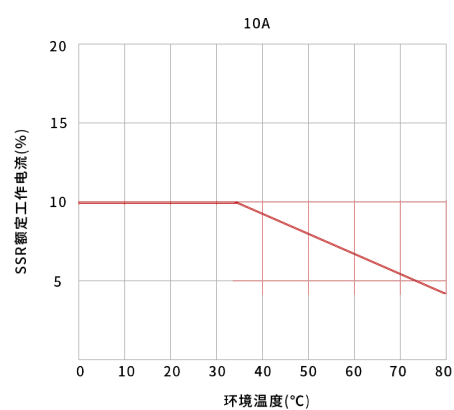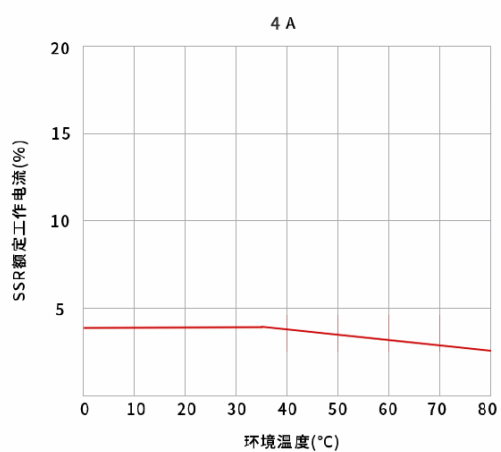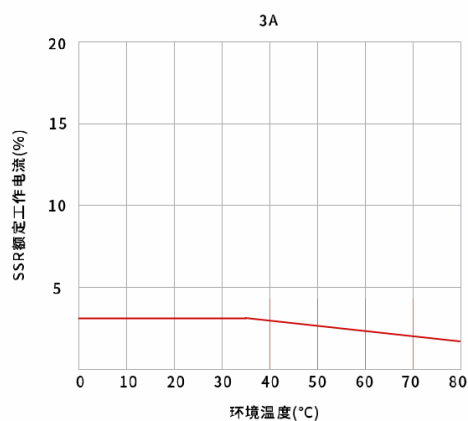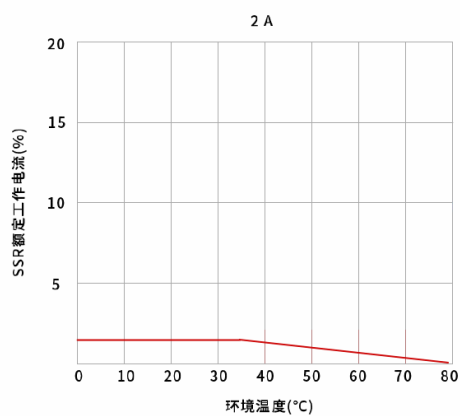

浙江申帝克电气有限公司

Ximandun Electronic Technology Co., Ltd

全国服务热线: 400-888-9277

投诉电话: 13165841810

官方网站: www.ximandun.com天猫: www.ximandun.Tmall.com